




YoLong Industrial

YO LONG HOPSTORM _FOR DRY HOPPING

YoLong HopStorm designed for dry hopping, inner central assembly with one filter, two reverse tangential side beer inlet make hops be even and full mixing, assembly with safety valve or CO2 pressure relief valve to hold pressure and discharge the oxygen out of HopStorm.

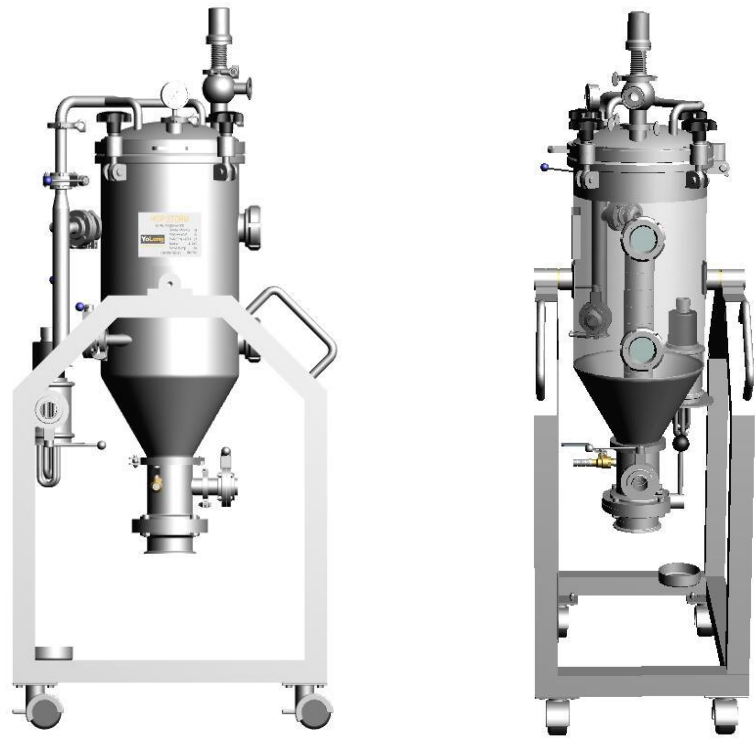

3KG HopStorm & CIP

SPECIAL DESIGN FOR DRY HOPPING

- Compact & skid design, high efficiency for dry hopping
- Simple operation, optimize fermentation period
- Customized available according beer type and hops adding
- High transfer rate of hops aroma and oil
- Optional of electric heating tube, Dual function of CIP for small tank.
- Self-cleaning and self-heating for disinfection



YoLong Industrial

YOLONG HOPSTORM_FOR DRY HOPPING



- Available capacity of 3kg to 200kg
- Top Pressure Manway
- Safe valve (0-0.4MPa)
- One pressure gauge (0-0.6MPa)
- Assembly Sanitary Spray Balls for Cleaning
- Side sight glass
- One pipe sight glass
- Bottom hop Outlet
- Optional Electric Heating Tube for CIP and self cleaning
- SKID Frame with Four Casters



Safety Valve



CO2 Pressure Relief Valve

SPECIFICATIONS OF HOPSTORM

Hop Pellets Type 45 or 90 (kg)	3	5	10	15	20	25	30	40	50	75	100	150	200
Work Volume (L)	30	40	75	110	150		225	300	375	550	750	1150	
Total Volume (L)	38	60	95	130	210		285	360	435	620	820	1220	
Design Pressure (bar)	1	1	1	1	1	1	1	1	1	1	1	1	1
Height (mm)	1620		2190			2400			2670		3525	3850	4010
OD (mm)	480*720		750*630			1405			1520		1690	1795	1850
Hops Adding Height (mm)	1280		1595			1780			2060		2910	3230	3385
Filter Length (mm)	600		1200			1450			1750		2430	2790	2950
Head Space (mm)	/		645			840			1140		1820	2170	2325
Work Platform (mm)	/		395			580			860		1710	2030	2185
Empty Weight (kg)	90		110										
Full Weight (kg)	130		200										