




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 YOLONG INDUSTRIAL CO., LTD. > ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

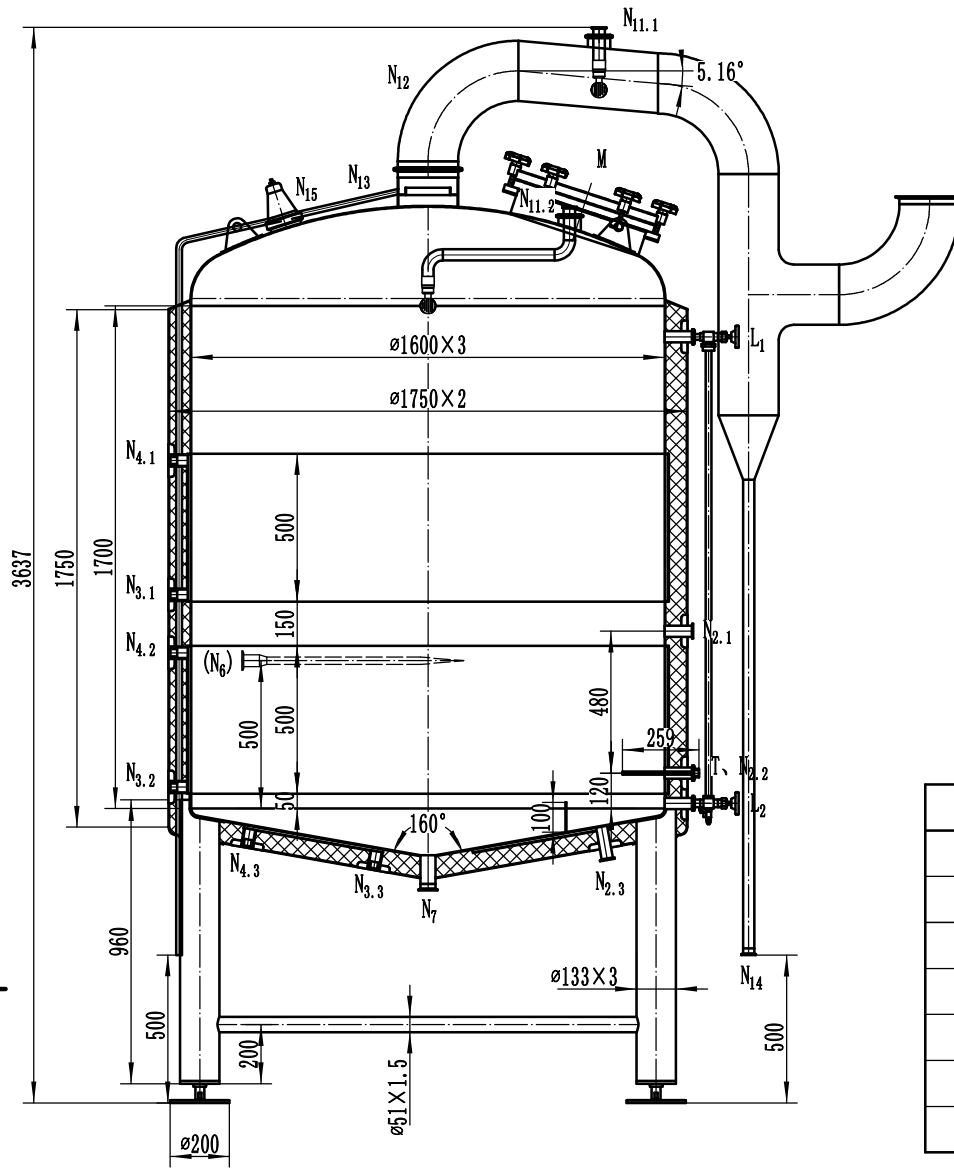

Technical parameter		
	Inner shell	Outer shell
Material	SUS304	SUS304
Thickness	3mm	2mm
Heating area m ²	5.9	
Insulation	Mineral wool	
Total volume	3510 L	
Working volume	2400 L	

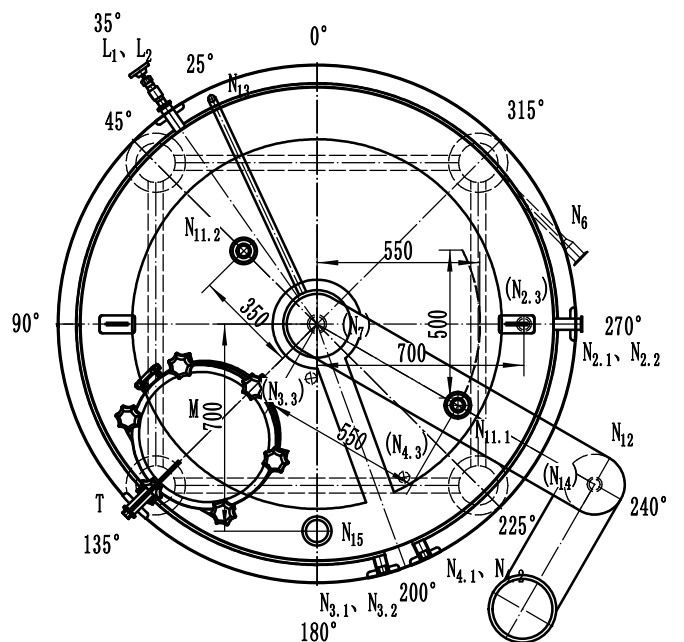

Specification			
Symbol	Spec	Connecting Style	Usage
M	ø450	Welding	Glass manway
N _{2.1-2.3}	1.5"	Tri-clamp	outlet
N _{3.1-3.3}	1"	NPT	Condensation outlet
N _{4.1-4.3}	1"	NPT	Steam inlet
N ₆	1.5"-1"	Tri-clamp	Tangential inlet
N ₇	2"	Tri-clamp	Outlet
N _{11.1-11.2}	3"/1.5"	Tri-clamp	Spray ball
N ₁₂	6"	Tri-clamp	Stacker
N ₁₃	0.75"	Tri-clamp	Condensation
T	1.5"/0.5"	Tri-clamp/NPT	Thermowell
L ₁ , L ₂	1"	Tri-clamp	Level
N ₁₄	1.5"	Tri-clamp	Condensation outlet
N ₁₅	4"	Bevel seat	Tank light

Project No.			
Drawing No.			
Version No. VI.5			
Customer Confirmation			
Designer	Eason Chang	Date	2018.07.03
Draft man		Date	
Proofreading		Date	
Reviewer		Date	

2400L Kettle & Whirlpool

SUS304

Drawing Mark	Quantity	Weight	Scale
	1		1:10
Total Page	page		
YOLong YOLONG INDUSTRIAL CO., LTD.			