


Technical parameter		
	Inner shell	Outer shell
Material	SUS304	SUS304
Thickness	3mm	2mm
Cooling area m <sup>2</sup>	6.5	
Insulation	PU-Foam	
Total volume	34.5 bbL	
Working volume	30 bbL	
Net weight	810 Kg	

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YOLONG INDUSTRIAL CO., LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF YOLONG INDUSTRIAL CO., LTD. IS PROHIBITED.

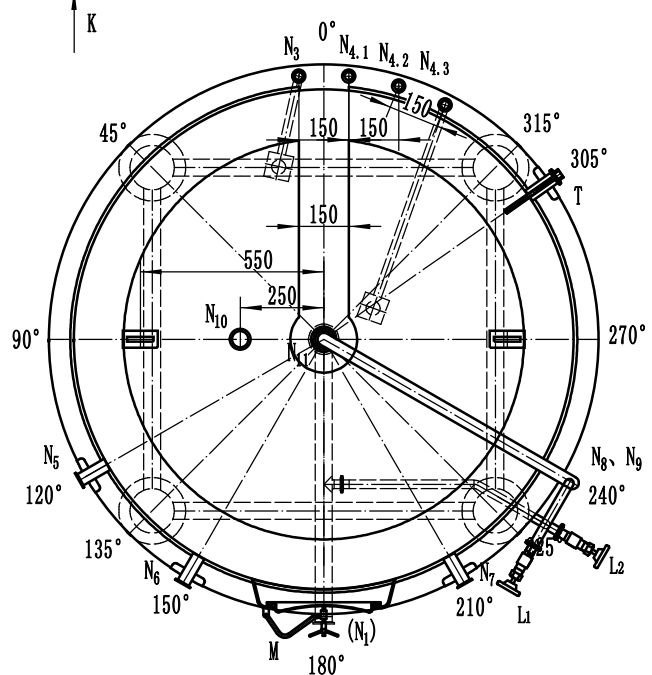

Specification

Symbol	Spec	Connecting Style	Usage
N <sub>1</sub>	2"	Tri-clamp	Outlet
N <sub>3</sub>	1.5"	NPT	Glycol outlet
N <sub>4.1-4.3</sub>	1"	NPT	Glycol inlet
N <sub>5</sub>	1.5"	Tri-clamp	Carbon stone
N <sub>6</sub>	1.5"	Tri-clamp	Spare hole
N <sub>7</sub>	1.5"	Tri-clamp	Sample hole
N <sub>8</sub>	1.5"	Tri-clamp	Bung valve
N <sub>9</sub>	1.5"	Tri-clamp	pressure gauge
N <sub>10</sub>	2"	Tri-clamp	PVRV
N <sub>11</sub>	3"-1.5"	Tri-clamp	Cleaning hole
T	1.5"-0.5"	Tri-clamp/NPT	Thermowell
M	580*480	Welding	Manhole
L <sub>1</sub> , L <sub>2</sub>	1"	Tri-clamp	Level

Project No.	
Drawing No.	
Version No.	V1.3
Customer Confirmation	
Designer	jason wang
Date	2018.11.22
Draft man	
Date	
Proofreading	
Date	
Reviewer	
Date	

30bbL BBT-D1500

SUS304

YI-04-1106A17			
Drawing Mark	Quantity	Weight	Scale
			1:16
Total	Page	page	
YoLong YOLONG INDUSTRIAL CO., LTD.			