


DX2041



Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/AC/DC

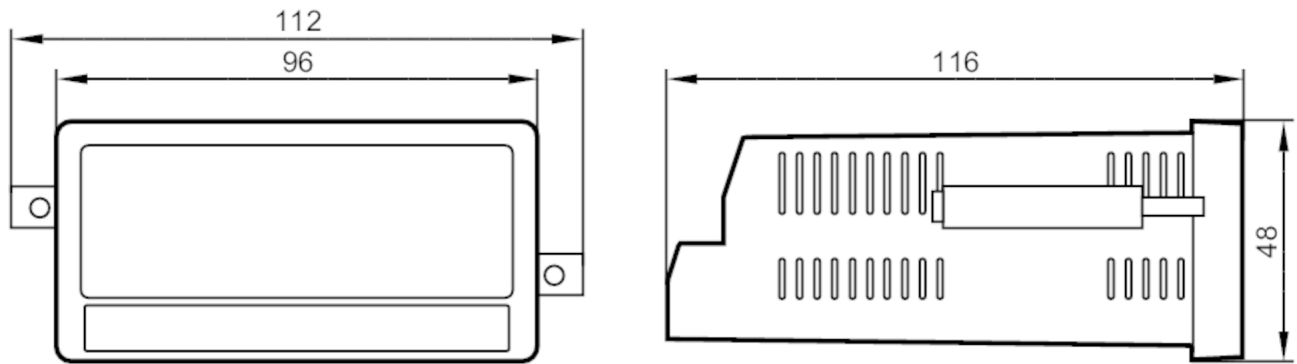

panel cutout 91 x 43 mm



Application

Application

displaying and monitoring analogue signals; e.g. pressure sensors, temperature sensors or flow sensors

Electrical data

Frequency AC	[Hz]	50...60
Operating voltage	[V]	115...230 AC / 18...30 DC
Current consumption	[mA]	100

Inputs / outputs

Number of inputs and outputs	Number of analogue inputs: 2
------------------------------	------------------------------

Inputs

Number of analogue inputs	2
---------------------------	---

Operating conditions

Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...70
Protection		IP 65
Protection rating terminals		IP 20

Tests / approvals

EMC	EN 61000-6-2
	EN 61000-6-3
	EN 61000-6-4

Mechanical data

Weight	[g]	349
Type of mounting		panel cutout: 91 x 43 mm
Dimensions	[mm]	48 x 112 x 116
Materials		Noryl UL94-V-0

Displays / operating elements

Display	colour display	full graphic LCD display, touch screen
---------	----------------	--

DX2041




Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/AC/DC

Electrical connection

screw terminals:

Connection

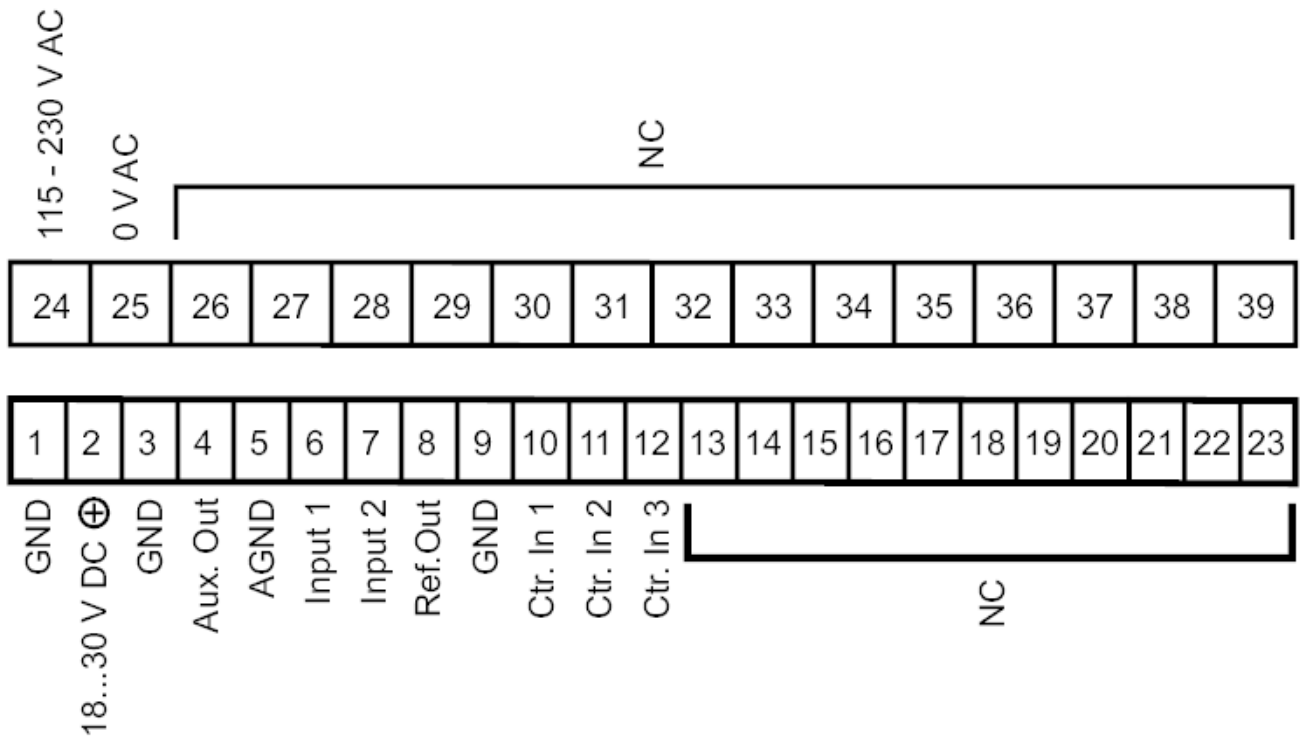

NC not used